



Polistream is an independent, fully resilient and automated subtitle delivery and transmission system specifically designed to work with any broadcast format or platform.


Polistream's flexible and modular design supports branding, transcoding, time-shifting and logging for subtitles, captions and graphics.

Polistream can be combined with OASYS Integrated Playout as a software solution or integrated with other automation systems using our new U8100 hardware platform configured with our vast array of software modules and internal cards to meet any subtitling requirement.

Key Features

- Server 2019, 2022 64-Bit OS
- Dual power supply
- UHD-8 Card = more channel interfaces
- Multi-channel, language, format
- Fully expandable
- Mixed: Open and DVB or Teletext
- ASI or IP based
- Playout, pass-through or mixed
- SD, HD & UHD
- Transcoding of all known formats
- 24/7/365 support

New Expanded List of Polistream Supported Formats and Outputs

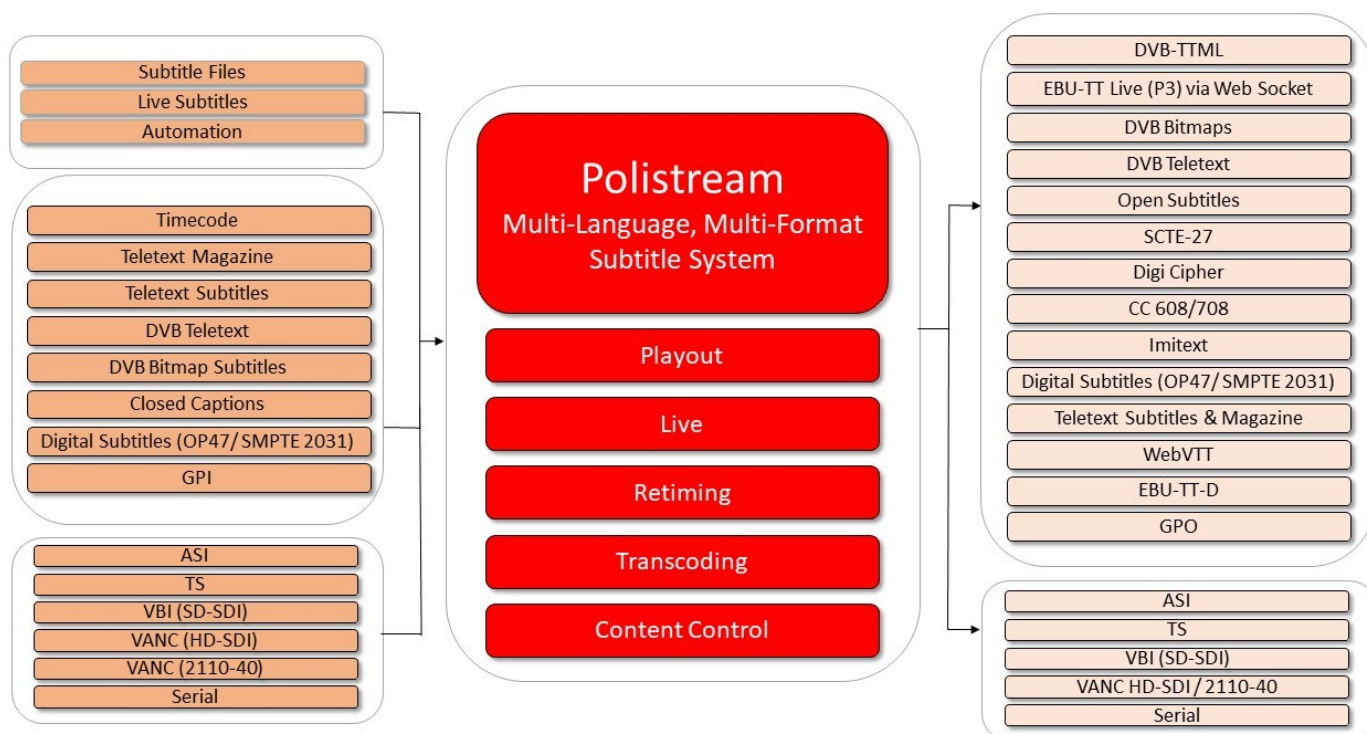

Operational Role

This new chassis supports the range of Polistream interface cards (including UHD-8, eight input card) and software modules.

Features

- SuperMicro 1RU Chassis
- Intel Xeon E3-2300 Pentium CPU Socket H5LG
- Samsung EVO 250G SSD
- SuperMicro X11SSW-F Motherboard
- Kingston 16GB DDR4 3200 ECC VLP UDIMM Memory
- MS Windows Server 2022 (16 Standard Core)
- 4x 40x56mm PWM Counter-Rotating Fans
- Dual 400 Watt Power Supplies
- Expansion Slots:
 - ⇒ 1 PCI-E 3.0 x4
 - ⇒ (in x 16, Right Riser Slot)
 - ⇒ 1 PCI-E x16 (Left Riser Slot)

Rear Panel Connectors

2x RJ45 GbE LAN with Intel® i210-AT- Ethernet
 2x 9 way D type Male—RS232 Serial Com 1 & 2
 1x 15 way Hi-Density D type SVGA monitor connection
 2 x USB connectors - USB 3.0
 2 x USB connectors - USB 2.0

Physical Dimensions (W x D x H)

437mm x 492mm x 43mm 1RU standard 19in rack-mounting
 17.2" x 19.37" x 1.69" inches

Weight

Unit 14KG/30.1 lbs.
 Shipping 17KG/37.48 lbs.

Control

There are no user configurable switches, links or front panel controls with the exception of a front panel power switch.

Indicators

Front Panel BSS Custom LEDs

Input Voltage Range

400W with 100 to 240 VAC
 400W 200 to 240 VAC

Input Line Frequency

50 – 60 Hz

Regularity

Power Supply Safety/EMC
 BSMI; CCC; CE/EMC; FCC class A; UL/CB; UL/CUL

Environmental Conditions

- 5°C to 35°C / 41° to 95°
- Relative humidity 8% to 90% non-condensing

Electro-magnetic Compliance & Safety

Electromagnetic Emissions: FCC Class A, EN 55022 Class A, EN 61000-3-2/3-3, CISPR 22 Class A

Electromagnetic Immunity: EN 55024/CISPR 24, (EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11)

Safety: CSA/EN/IEC/UL 60950-1 Compliant, UL or CSA Listed (USA and Canada), CE Marking (Europe)

Datasheet specifications are subject to change without notice and do not form part of any contract.

All trademarks recognized E&OE.



BroadStream embraces the adoption of COTS or Component-off-the-Shelf sourcing to provide reliable and durable hardware that is cost-effective, easier-to-repair and upgrade.

Our new Universal 1U 8100 chassis embraces this IT centric approach yet continues Screen's tradition of employing a broad array of software modules and internal cards to create a subtitle encoding and transmission system that is highly flexible and reliable to meet your exacting requirements.

Contact Us US: +1 404-327-8300 | International: +44 1473 831700 | sales@broadstream.com | <https://broadstream.com>